MAS304INMXV

MASTER SERIES INDUCTION RANGE 30" - 4 HEATING ZONES - ELECTRIC **OVEN - STAINLESS STEEL FINISH**





Fingerprint resistant stainless steel finish

Make cleaning a breeze thanks to the fingerprint resistant finish on all knobs, handles and oven door surfaces.

Bertazzoni signature counter-deep maintop

Bertazzoni signature stainless counter-deep maintop is designed to install flush with most kitchen countertops for a perfectly integrated look. Precise and flexible heating is provided by 4 latest generation extra-large induction zones with bridging of right-side zones. Complete the range with the optional cast-iron griddle.

Extra large oven with dual convection

The 4.7 cu.ft electric main oven with dual horizontal convection allows even baking and roasting on 7 shelf levels. Bertazzoni ovens are equipped with an extralarge high-power broiler for broiling and grilling.

Advanced programming and controls for the oven

The elegant temperature gauge for control of oven temperature during pre-heating and baking is a signature of every Bertazzoni range.

Best-in-class features and design

The soft-motion oven door with edge-to-edge tempered glass is a masterpiece of European engineering and makes the oven door very easy to wipe clean. The stainless steel racks included with the range can be equipped with optional telescopic glides.

GENERAL CHARACTERISTICS		
Worktop	4 induction zones	
Front right	2100W (3700W booster)	
Front left	1400W (2200W booster)	
Back right	2100W (3700W booster)	
Back left	2300W (3700W booster)	
Knobs	Metal	
Cooking modes	9	
Ггау	1 baking tray with grill trivet	
Shelves	2 standard with handle	
evels	Laterals grids	
nner door	Squared 3 glasses	
Door hinges	Soft motion	
_egs	ø 2 3/8 inches stainless steel	

LOTINICAL SELCIFICATIONS		
The atrice of the second	120/208 V 60HZ - 103	

Electrical requirements	120/208 V 60HZ - 10300W 120/240 V 60HZ - 11000W 40A with dedicated circuit
Warranty	2 years parts & labor
Packaging dimensions	H:42 1/8 W:33 7/8 D:29 15/16



version: 2 bertazzoni.com


MAS304INMXV

MASTER SERIES INDUCTION RANGE 30" - 4 HEATING ZONES - ELECTRIC OVEN - STAINLESS STEEL FINISH




DIMENSIONS


SIDE VIEW




LEG DETAILS




FRONT VIEW



WORKTOP DETAILS




REAR VIEW



INSTALLATION



A properly-grounded horizontally mounted electrical receptacle should be installed no higher than 3" (7.6 cm) above the floor, no less than 2" (5 cm) and no more than 8" (20,3 cm) from the left side (facing product). Check all local code requirements.

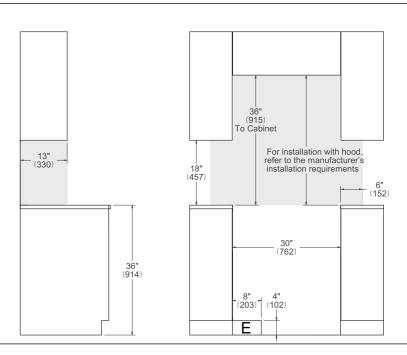

NOTE

- a. Electrical Connection
- b. Gas Connection

Disclaimer: while every effort has been made to insure the accuracy of the information contained in this document, Fratelli Bertazzoni reserves the right to change any part of the information at any time without notice. For detailed installation specifications consult the installation manual. Fratelli Bertazzoni, Bertazzoni and the winged wheel brand icon are registered trademarks of Bertazzoni Spa.