



# MAYTAG ENGINEERED MAYTAG BUILT MAYTAG® MULTI-LOAD

INTRODUCING THE MULTI-LOAD WASHER



FOR ON-PREMISES LAUNDRY



## DEPENDABLE BY DESIGN

The Maytag® Multi-Load Washer is built to provide the performance and durability your business needs.



### PERFORMANCE

Experience optimal wash performance with a consistent spin-out system for all your tough loads.



### EASE OF USE

Engineered to deliver an optimal user experience – our intuitively designed software allows owners and operators to navigate and manage system controls, and program cycle settings – with simplicity, efficiency, and confidence.



### DURABILITY

With a robust construction and commercial-grade components – the Maytag® Multi-Load Washer is designed to continually handle heavy loads of laundry.



### SERVICEABILITY

All of our washers are designed with maintenance in mind: Almost all service procedures can be performed from the front and top of the machine, via quick access panels.



## BUILT FOR BUSINESS

The Maytag® Multi-Load Washer can be configured to meet your exact needs. Constructed in both soft- and rigid-mounts, and available through multiple financing options – it is the solution you need to power your laundry operations.

## ON-PREMISES LAUNDRY

## RELIABILITY IN EVERY CYCLE

Ruggedly constructed and equipped with intuitive, flexible controls, our washer doesn't just perform, it performs efficiently, over and over again.

**10 CHEMICAL INJECTION PORTS**  
to customize the best formula based on specific washing needs

### SPLIT-LID DISPENSER

with an easy-to-flush design and four compartments: Pre-Wash and Main Wash (powder or liquid); and Bleach and Fabric Softener (liquid only)

### FLEXIBLE CONTROLS

with an intuitive screen flow that has been user-tested for navigation and comprehension

**CONSISTENT SPIN-OUT PERFORMANCE**  
with G-forces of 200 for rigid-mounts and 400 for soft-mounts – to achieve max extraction

**SECURE DOOR LOCK**  
with no moving parts, and an ergonomic, solid-steel door handle

**DRIVE SYSTEM AND WASH UNIT**  
complete with a 304 stainless-steel drum and tub, commercial-grade bearings, a Variable Frequency Drive, and commercial-grade motor

**ROBUST CONSTRUCTION**  
to handle tough loads and extraction forces

**THOUGHTFULLY DESIGNED**  
for easy access and serviceability using minimal screws and key locks






# EXPERIENCE COMPLETE CONTROL

Equipped with customizable settings designed to increase efficiency – our machines are built to help keep your operation running at full speed.

## PROGRAMMABILITY

Ensure every load is washed the way you want – every time – and optimize your laundry workflow with system configurations that reinforce timeliness and efficiency.




## CYCLE SETTINGS

With the ability to program up to 99 cycles, each with up to 99 phases, you have the flexibility to customize wash cycles, from formulas to spin time, all to fit your process needs.



## MULTILINGUAL LANGUAGE OPTIONS

Users are able to choose from multiple language options to ensure they can conveniently navigate each machine.



## DETERGENT AND SOLUTIONS SETTINGS

Determine which detergents and solutions are used during every cycle – and program them to release on time, and in correct amounts, with our split-lid, four-compartment dispenser.

# CONNECTED FOR EFFICIENCY

Maytag Connect 360™ Technology\* keeps you up to date with the performance of every machine – to help ensure your operation is running efficiently at all times.

## MAYTAG CONNECT 360™ TECHNOLOGY

With a WiFi-enabled system, Maytag Connect 360™ Technology\* gives facility managers the ability to know how their washers are performing, in real-time. Our intuitively designed software provides diagnostic reports, maintenance notifications, and software updates – to help keep each machine working at full capacity.



## POWERFUL ONLINE TOOLS

Receive select diagnostics and alerts for preventative maintenance, and make program changes remotely – via WiFi – or onsite with our USB port.



## SERVICE NOTIFICATIONS

Receive alerts for service and maintenance issues – to help identify where the problem exists, so technicians can come prepared to repair the washer in timely fashion.



## OVER-THE-AIR UPDATES

Software upgrades can be made automatically through the WiFi-enabled board or with USB port– keeping every machine constantly updated with the latest technology from Maytag.



## 24/7 ACCESS TO INSIGHTS

Conveniently access every machine's diagnostic reports – to better understand, prevent, and solve performance issues, for operational efficiency.



\*WiFi required. Features subject to change. Details and privacy info at [connect360.maytag.com](https://connect360.maytag.com).



SOFT-MOUNT SPECIFICATIONS

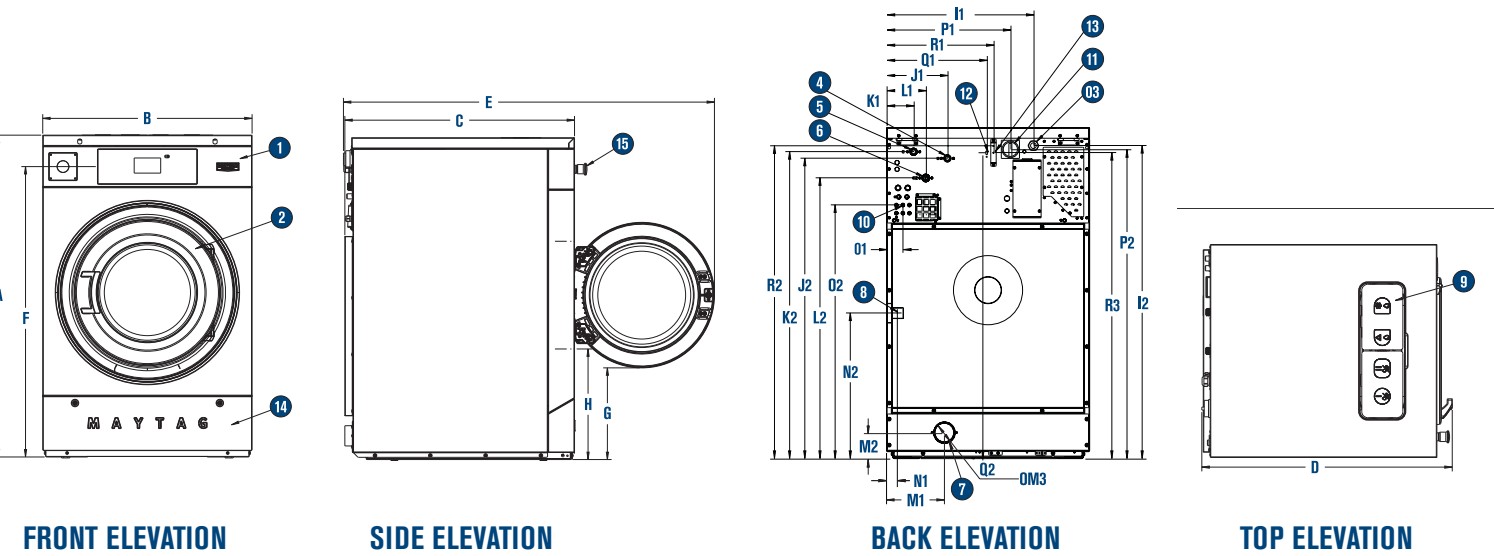


DIAGRAM KEY

- 1

Control Console
- 2

Loading Door
- 3

Electric Connection
- 4

Hot Water
- 5

Cold Water
- 6

Third Water
- 7

Drain
- 8

Steam Connection
- 9

Soap Dispenser
- 10

Automatic Liquid Soap Manifold
- 11

Electric Disconnect
- 12

USB
- 13

Fuses
- 14

Toe Panel
- 15

Stop Switch

		A	B	C	D	E	F	G	H	I1	I2	J1	J2	K1	K2	L1	L2	M1	M2	OM3	N1	N2	O1	O2	P1	P2	Q1	Q2	R1	R2	R3
20S	MM	1112	711	720	781	1170	993	353	423	502	1048	225	1003	101	1028	146	930	229	90	70	N/A	N/A	70	826	419	1035	330	1023	355	1048	1023
	INCH	43 3/4	28	28 3/4	30 3/4	46	39 1/4	13 3/4	16 3/4	19 3/4	41 1/4	8 1/2	39 1/2	4	40 1/2	5 3/4	36 3/4	9	3 1/2	2 3/4	N/A	N/A	2 3/4	32 1/2	16 1/2	40 3/4	13	40 1/4	14	41 1/4	40 1/4
30S	MM	1222	794	872	935	1409	1103	348	420	588	1159	225	1112	101	1137	146	1041	229	90	70	N/A	N/A	70	936	502	1146	416	1133	441	1159	1133
	INCH	48 1/8	31 1/4	34 3/8	36 3/4	55 1/2	43 3/8	13 3/4	16 1/2	23 1/8	45 5/8	8 1/2	43 3/4	4	44 3/4	5 3/4	41	9	3 1/2	2 3/4	N/A	N/A	2 3/4	36 1/8	19 3/4	45 1/8	16 3/4	44 3/8	17 3/8	45 3/8	44 3/8
40S	MM	1410	970	901	954	1477	1290	475	546	657	1347	300	1228	175	1324	175	1228	270	111	70	63	698	70	1094	572	1334	486	1321	511	1347	1321
	INCH	55 1/2	38 1/4	35 1/2	37 1/2	58 1/4	50 3/4	18 3/4	21 1/2	25 3/4	53	11 3/4	48 3/8	6 7/8	52 1/4	6 7/8	48 3/8	10 3/4	4 3/8	2 3/4	2 1/2	27 1/2	2 3/4	43 1/8	22 1/2	52 1/2	19 1/8	52	20 1/4	53	52
55S	MM	1410	970	1036	1100	1624	1290	475	546	657	1347	300	1228	175	1324	175	1228	270	111	70	63	698	70	1094	572	1334	486	1321	511	1347	1321
	INCH	55 1/2	38 1/4	40 3/4	43 3/4	64	50 3/4	18 3/4	21 1/2	25 3/4	53	11 3/4	48 3/8	6 7/8	52 1/4	6 7/8	48 3/8	10 3/4	4 3/8	2 3/4	2 1/2	27 1/2	2 3/4	43 1/8	22 1/2	52 1/2	19 1/8	52	20 1/4	53	52
65S	MM	1410	970	1110	1173	1697	1290	475	546	657	1347	300	1228	175	1324	175	1228	270	111	70	63	698	70	1094	572	1334	486	1321	511	1347	1321
	INCH	55 1/2	38 1/4	43 3/4	46 1/4	66 3/4	50 3/4	18 3/4	21 1/2	25 3/4	53	11 3/4	48 3/8	6 7/8	52 1/4	6 7/8	48 3/8	10 3/4	4 3/8	2 3/4	2 1/2	27 1/2	2 3/4	43 1/8	22 1/2	52 1/2	19 1/8	52	20 1/4	53	52



**Three-Year Limited Warranty on Parts.** For the first three (3) years from the date of purchase, when this commercial appliance is installed, maintained, and operated according to the instructions attached to or furnished with the product. Maytag® Commercial Laundry brand of Whirlpool Corporation (hereafter “Maytag”) will pay for factory-specified parts or original equipment manufacturer parts to correct defects in materials or workmanship.

**Fourth- and Fifth-Year Limited Warranty on Certain Parts.** In the fourth year and fifth years from the date of purchase, Maytag will pay for the following washer parts: the outer shell, drum and shaft assembly, inner welded frame, and bearings and seals. Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

MODEL	MYS20PN	MYS30PN	MYS40PN	MYS55PN	MYS65PN
MOTOR					
Size – HP	1.0	2.0	3.0	4.0	4.0
CAPACITY					
Cylinder Volume – cu. ft. (liters)	2.58 (73)	4.61 (131)	6.04 (171)	8.14 (230)	9.25 (262)
Cylinder Diameter – in. (mm)	20.9 (530)	24.4 (620)	29.5 (750)	29.5 (750)	29.5 (750)
Cylinder Depth – in. (mm)	13.9 (352)	17.9 (454)	16.2 (411)	21.6 (548)	24.4 (621)
Dry Load Capacity – lb. (kg)	20 (9)	30 (14)	40 (18)	55 (25)	65 (30)
EXTRACT FORCE					
Maximum Extract Force (G-force)	400	400	400	400	350
CONNECTIVITY					
USB Programmability	Yes	Yes	Yes	Yes	Yes
Maytag Connect 360™ Technology* Ready	Yes	Yes	Yes	Yes	Yes
DIMENSIONS					
Depth – in. (mm)	28.4 (721)	34.3 (872)	35.5 (901)	40.8 (1,037)	43.7 (1,110)
Width – in. (mm)	28.0 (710)	31.3 (795)	38.2 (970)	38.2 (970)	38.2 (970)
Height – in. (mm)	43.8 (1,112)	48.1 (1,222)	55.5 (1,410)	55.5 (1,410)	55.5 (1,410)
Door Opening – in. (mm)	12.9 (328)	16.1 (410)	18.1 (459)	18.1 (459)	18.1 (459)
CRATED DIMENSIONS					
Width – in. (mm)	29.8 (756)	33.1 (841)	39.5 (1,003)	39.5 (1,003)	39.5 (1,003)
Depth – in. (mm)	33.4 (854)	39.8 (1,010)	41.0 (1,042)	46.4 (1,178)	49.3 (1,251)
Height – in. (mm)	50.0 (1,270)	54.4 (1,381)	61.4 (1,560)	61.4 (1,560)	61.4 (1,560)
APPROXIMATE WEIGHT					
Uncrated – lb. (kg)	415 (188)	582 (264)	851 (386)	894 (406)	944 (428)
Crated – lb. (kg)	446 (202)	616 (279)	889 (403)	933 (423)	984 (446)
LOADING QUANTITY					
Full Truck (53' / 48')	60 / 54	38 / 34	32 / 28	32 / 28	32 / 28
40' HC Container	42	28	24	22	21
20' Container	18	14	10	10	9
ELECTRICAL CONNECTION OPTIONS (VOLTS/Hz/PHASE)					
W = 120 / 60 / 1 (no electrical heating)	Yes	Yes	No	No	No
T = 208 – 240 / 50 – 60 / 1 (no electrical heating)	Yes	Yes	Yes	Yes	Yes
S = 220 – 240 / 50 – 60 / 1 (no electrical heating)	Yes	Yes	Yes	Yes	Yes
V = 208 – 240 / 50 – 60 / 3	Yes	Yes	Yes	Yes	Yes
N = 380 – 415 / 50 – 60 / 3	Yes	Yes	Yes	Yes	Yes
R = 440 – 480 / 50 – 60 / 3	Yes	Yes	Yes	Yes	Yes
WATER HEATING OPTIONS					
Hot/Cold Water Connections Only	Yes	Yes	Yes	Yes	Yes
Electrical Heating (size of heating elements, kW)	Yes (8)	Yes (12)	Yes (16)	Yes (18)	Yes (18)
Electrical Heating, Optional Alternate Heating Element Size- kW	12	8	N/A	N/A	N/A
Steam Kit Option	No	No	Yes	Yes	Yes
WATER, CHEMICAL DISPENSING, DRAINS					
Number of Water Inlets	2	2	2	2	2
Optional Third Water Inlet	Yes	Yes	Yes	Yes	Yes
Inlet Sizes – in. (mm)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)	3/4 (19)
Operating Pressure – PSI (bar)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)
Number of Dispenser Compartments	4	4	4	4	4
External Chemical Connections, Number	10	10	10	10	10
Dump Valve Drain, Size – in. (mm)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)
Second Dump Valve Drain Option	No	No	No	Yes	Yes
Drain Pump Option	Yes	Yes	Yes	No	No
SOUND PRESSURE-dbA	<70	<70	<70	<70	<70

\*WiFi required. Features subject to change. Details and privacy info at [connect360.maytag.com](http://connect360.maytag.com). See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

®/™ ©2018 Maytag. All rights reserved.

®/™ ©2018 Maytag. All rights reserved.



RIGID-MOUNT SPECIFICATIONS

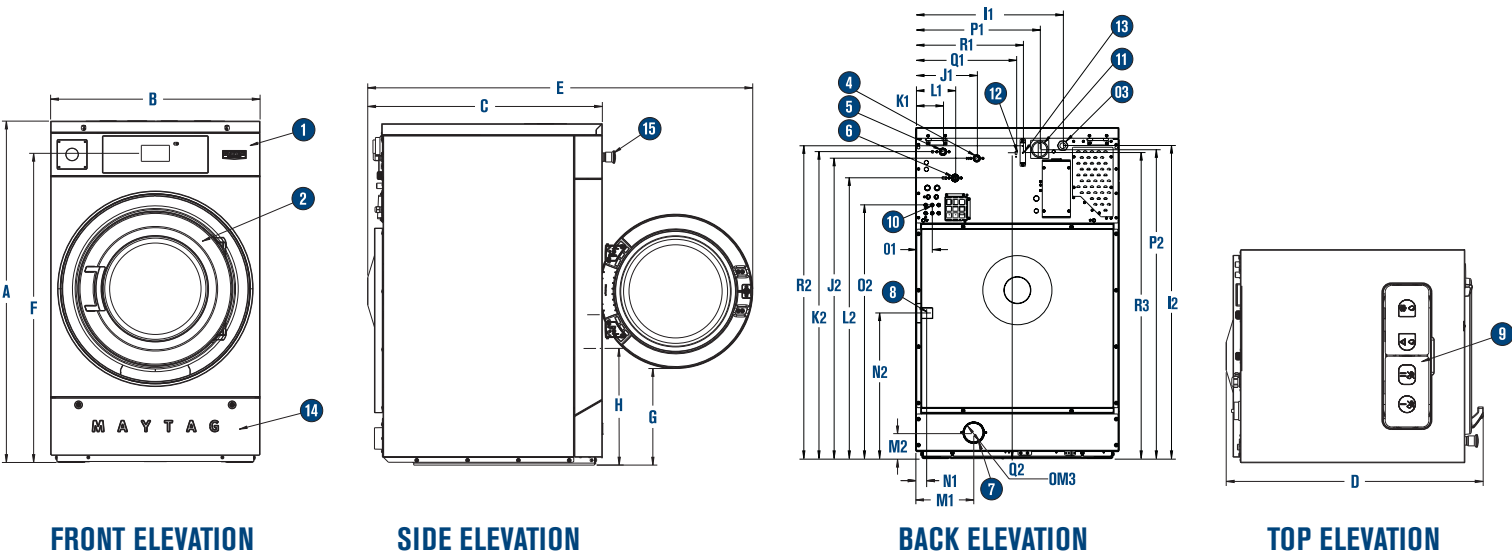


DIAGRAM KEY

- 1

Control Console
- 2

Loading Door
- 3

Electric Connection
- 4

Hot Water
- 5

Cold Water
- 6

Third Water
- 7

Drain
- 8

Steam Connection
- 9

Soap Dispenser
- 10

Automatic Liquid Soap Manifold
- 11

Electric Disconnect
- 12

USB
- 13

Fuses
- 14

Toe Panel
- 15

Stop Switch

		A	B	C	D	E	F	G	H	I1	I2	J1	J2	K1	K2	L1	L2	M1	M2	OM3	N1	N2	O1	O2	P1	P2	Q1	Q2	R1	R2	R3
20R	MM	1112	660	686	772	1159	994	356	425	451	1045	225	1000	101	1023	146	927	168	95	70	N/A	N/A	60	826	368	1032	280	1019	305	1054	1019
	INCH	43 3/4	26	27	30 3/8	45 5/8	39 3/8	14	16 3/4	17 3/4	41 1/8	8 7/8	39 3/8	4	40 1/4	5 3/4	36 1/2	6 5/8	3 3/4	2 3/4	N/A	N/A	2 3/8	32 1/2	14 1/2	40 3/8	11	40 3/8	12	41 1/2	40 3/8
25R	MM	1222	750	724	791	1264	1108	346	419	543	1156	225	1108	101	1133	146	1035	213	95	70	N/A	N/A	70	937	458	1140	371	1130	394	1155	1130
	INCH	48 1/8	29 1/2	28 1/2	31 1/8	49 3/4	43 3/8	13 3/8	16 1/2	21 1/8	45 1/2	8 7/8	43 3/8	4	44 3/8	5 3/4	40 3/4	8 3/8	3 3/4	2 3/4	N/A	N/A	2 3/4	36 3/8	18	44 3/8	14 3/8	44 1/2	15 1/2	45 1/2	44 1/2
30R	MM	1222	750	841	905	1378	1108	346	419	543	1156	225	1108	101	1133	146	1035	213	95	70	N/A	N/A	70	937	458	1140	371	1130	394	1155	1130
	INCH	48 1/8	29 1/2	33 1/8	35 3/8	54 1/4	43 3/8	13 3/8	16 1/2	21 1/8	45 1/2	8 7/8	43 3/8	4	44 3/8	5 3/4	40 3/4	8 3/8	3 3/4	2 3/4	N/A	N/A	2 3/4	36 3/8	18	44 3/8	14 3/8	44 1/2	15 1/2	45 1/2	44 1/2
40R	MM	1410	889	883	946	1470	1289	467	537	578	1343	289	1244	175	1321	175	1224	283	133	70	45	534	70	1095	492	1330	406	1317	429	1343	1318
	INCH	55 1/2	35	34 3/4	37 1/4	57 1/8	50 3/4	18 3/8	21 1/8	22 3/4	52 1/8	11 3/8	49	6 7/8	52	6 7/8	48 3/16	11 1/8	5 1/4	2 3/4	1 3/4	21	2 3/4	43 3/8	19 3/8	52 3/8	16	51 1/8	16 3/8	52 1/8	51 1/8
55R	MM	1410	889	1019	1083	1607	1289	467	537	578	1343	289	1244	175	1321	175	1224	283	133	70	45	534	70	1095	492	1330	406	1317	429	1343	1318
	INCH	55 1/2	35	40 1/8	42 1/8	63 3/4	50 3/4	18 3/8	21 1/8	22 3/4	52 1/8	11 3/8	49	6 7/8	52	6 7/8	48 3/16	11 1/8	5 1/4	2 3/4	1 3/4	21	2 3/4	43 3/8	19 3/8	52 3/8	16	51 1/8	16 3/8	52 1/8	51 1/8
65R	MM	1410	889	1092	1156	1680	1289	467	537	578	1334	289	1242	175	1321	175	1224	283	133	70	45	534	70	1095	492	1330	406	1317	429	1343	1318
	INCH	55 1/2	35	43	45 1/2	66 1/8	50 3/4	18 3/8	21 1/8	22 3/4	52 1/8	11 3/8	49	6 7/8	52	6 7/8	48 3/16	11 1/8	5 1/4	2 3/4	1 3/4	21	2 3/4	43 3/8	19 3/8	52 3/8	16	51 1/8	16 3/8	52 1/8	51 1/8



**Three-Year Limited Warranty on Parts.** For the first three (3) years from the date of purchase, when this commercial appliance is installed, maintained, and operated according to the instructions attached to or furnished with the product. Maytag® Commercial Laundry brand of Whirlpool Corporation (hereafter "Maytag") will pay for factory-specified parts or original equipment manufacturer parts to correct defects in materials or workmanship.

**Fourth- and Fifth-Year Limited Warranty on Certain Parts.** In the fourth year and fifth year from the date of purchase, Maytag will pay for the following washer parts: the outer shell, drum and shaft assembly, inner welded frame, and bearings and seals. Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

MODEL	MYR20PN	MYR25PN	MYR30PN	MYR40PN	MYR55PN	MYR65PN
MOTOR						
Size – HP	0.5	0.75	1.0	1.5	2.0	2.0
CAPACITY						
Cylinder Volume – cu. ft. (liters)	2.58 (73)	3.55 (101)	4.61 (131)	6.04 (171)	8.14 (230)	9.25 (262)
Cylinder Diameter – in. (mm)	20.9 (530)	24.4 (620)	24.4 (620)	29.5 (750)	29.5 (750)	29.5 (750)
Cylinder Depth – in. (mm)	13.9 (352)	13.9 (352)	17.9 (454)	16.2 (411)	21.6 (548)	24.4 (621)
Dry Load Capacity – lb. (kg)	20 (9)	25 (11)	30 (14)	40 (18)	55 (25)	65 (30)
EXTRACT FORCE						
Maximum Extract Force (G-force)	200	200	200	200	200	200
CONNECTIVITY						
USB Programmability	Yes	Yes	Yes	Yes	Yes	Yes
Maytag Connect 360™ Technology* Ready	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS						
Depth – in. (mm)	27 (686)	28.5 (725)	33.1 (840)	34.8 (883)	40.1 (1,019)	43 (1092)
Width – in. (mm)	26 (660)	29.5 (750)	29.5 (750)	35.0 (890)	35.0 (890)	35.0 (890)
Height – in. (mm)	43.8 (1,112)	48.1 (1,222)	48.1 (1,222)	55.5 (1,410)	55.5 (1,410)	55.5 (1,410)
Door Opening – in. (mm)	12.9 (328)	16.1 (410)	16.1 (410)	18.1 (459)	18.1 (459)	18.1 (459)
CRATED DIMENSIONS						
Width – in. (mm)	27.8 (705)	31.5 (800)	31.5 (800)	37.0 (940)	37.0 (940)	37.0 (940)
Depth – in. (mm)	33.1 (841)	34.6 (880)	39.0 (991)	40.5 (1,029)	46.0 (1,169)	48.9 (1,242)
Height – in. (mm)	50.0 (1,270)	54.4 (1,381)	54.4 (1,381)	61.4 (1,560)	61.4 (1,560)	61.4 (1,560)
APPROXIMATE WEIGHT						
Uncrated – lb. (kg)	334 (151)	447 (203)	489 (222)	688 (312)	731 (332)	764 (347)
Crated – lb. (kg)	365 (166)	480 (218)	523 (237)	724 (328)	769 (349)	802 (364)
LOADING QUANTITY						
Full Truck (53' / 48')	63 / 57	56 / 50	48 / 42	34 / 30	34 / 30	34 / 30
40' HC Container	45	30	30	24	24	21
20' Container	22	14	14	12	12	10
ELECTRICAL CONNECTION OPTIONS (VOLTS/Hz/PHASE)						
W = 120 / 60 / 1 (no electrical heating)	Yes	Yes	Yes	No	No	No
T = 208 – 240 / 50 – 60 / 1 (no electrical heating)	Yes	Yes	Yes	Yes	Yes	Yes
S = 220 – 240 / 50 – 60 / 1 (no electrical heating)	Yes	Yes	Yes	Yes	Yes	Yes
V = 208 – 240 / 50 – 60 / 3	Yes	Yes	Yes	Yes	Yes	Yes
N = 380 – 415 / 50 – 60 / 3	Yes	Yes	Yes	Yes	Yes	Yes
R = 440 – 480 / 50 – 60 / 3	Yes	Yes	Yes	Yes	Yes	Yes
WATER HEATING OPTIONS						
Hot/Cold Water Connections Only	Yes	Yes	Yes	Yes	Yes	Yes
Electrical Heating (size of heating elements, kW)	Yes (8)	Yes (8)	Yes (12)	Yes (16)	Yes (18)	Yes (18)
Electrical Heating, Optional Alternate Heating Element Size- kW	12	12	8	N/A	N/A	N/A
Steam Kit Option	No	No	No	Yes	Yes	Yes
WATER, CHEMICAL DISPENSING, DRAINS						
Number of Water Inlets	2	2	2	2	2	2
Optional Third Water Inlet	Yes	Yes	Yes	Yes	Yes	Yes
Inlet Sizes – in. (mm)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)	3/4 (19)
Operating Pressure – PSI (bar)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)	20 – 120 (1-8)
Number of Dispenser Compartments	4	4	4	4	4	4
External Chemical Connections, Number	10	10	10	10	10	10
Dump Valve Drain, Size – in. (mm)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)	Yes, 3 (76)
Second Dump Valve Drain Option	No	No	No	No	Yes	Yes
Drain Pump Option	Yes	Yes	Yes	Yes	No	No
SOUND PRESSURE-dbA	<70	<70	<70	<70	<70	<70

\*WiFi required. Features subject to change. Details and privacy info at [connect360.maytag.com](http://connect360.maytag.com). See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

## ON-PREMISES LAUNDRY



## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



[MAYTAGCOMMERCIALLAUNDRY.COM](http://MAYTAGCOMMERCIALLAUNDRY.COM)